



MIXEURS PORTABLES ET AUTRES

| RIMOUSKI

559, rue de Lausanne
Tel.: 418 723-7936
Fax: 418 723-8172

1 888 342-5637
dickner@dickner.com

| RIVIÈRE-DU-LOUP

370, rue Témiscouata
Tel.: 418 867-1824
Fax: 418 862-9881

1 800 463-8027
riviereduloup@dickner.com

| MONT-JOLI

1281, boul. Jacques Cartier
Tel.: 418 775-4200
Fax: 418 775-4996

1 418 775-4200
montjoli@dickner.com



Mix-N-Go Concrete Mixers

Welcome to the future of portable concrete mixers.



Model MC-3SEA

Model MC-3PEA

The Mix-N-Go Concrete Mixer combines a host of performance-enhancing features with ease of transportation to, from and around the job site. It can mix up to three cubic feet of material, making the Mix-N-Go the tool of choice for homeowners and small contractors.

With a stronger frame and sturdy steel or polyethylene drum, the Mix-N-Go is ideal for small footings and bases, binding block and concrete patching. It is available with a gasoline engine or electric motor for operator convenience and for increased versatility. It can also be used as a wheelbarrow to transport concrete, debris and other material around the job site.

When the job is complete, the compact Mix-N-Go fits neatly into the trunk of a car.

- New replaceable blades bolted to the drum.
- Choice of steel or polyethylene drums.
- Engine options — Gasoline or $\frac{3}{4}$ HP, 115 single-phase UL- and CSA-approved electric motor.*
- Job site convenience — can use standard household power.
- Mixer stand allows drum to rotate 360 degrees.
- New on/off switch protection — water-resistant and dust proof.
- Pneumatic tires.


Mix-N-Go Concrete Mixers — Specifications

Model	Drum Construction	Max. Mixing Capacity*	Engine**	Height in. (mm)	Width in. (mm)	Length in. (mm)	Stand Weight lb. (kg)	Dry Weight lb. (kg)
MC3SEA	Steel	3.0 cu. ft.	¾ HP, 115V, 1ø Electric Motor	34 (863.6)	23⅝ (584.2)	48½ (1219.2)	35 (15.9)	138 (62.6)
MC3PEA	Polyethylene	3.0 cu. ft.	¾ HP, 115V, 1ø Electric Motor	34 (863.6)	23⅝ (584.2)	48½ (1219.2)	35 (15.9)	138 (62.6)
MC3SBA	Steel	3.0 cu. ft.	Briggs & Stratton 148cc	34 (863.6)	23⅝ (584.2)	48½ (1219.2)	35 (15.9)	132 (59.9)
MC3PBA	Polyethylene	3.0 cu. ft.	Briggs & Stratton 148cc	34 (863.6)	23⅝ (584.2)	48½ (1219.2)	35 (15.9)	132 (59.9)



Bolt-in replaceable mixing blades

Stronger, thicker drum (available in steel or poly)

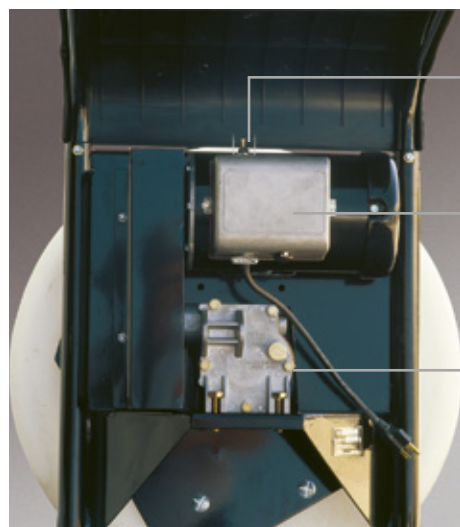


Water-resistant, dust-proof on/off switch

Strong ¾ HP brushless motor, UL and CSA approved

Improved gearbox; gears immersed in oil for long trouble-free life

Dimensions

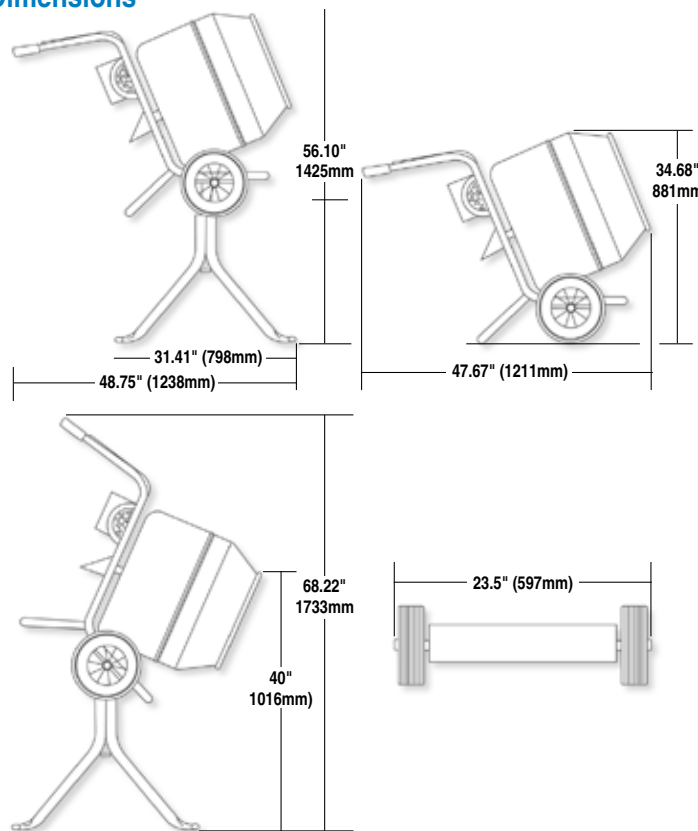

* Actual mix capacity may vary depending on aggregate size and mix design.

** Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

© COPYRIGHT 2011, MULTQUIP INC.



MULTIQUIP INC.
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-421-1244
FAX: 310-537-3927
E-MAIL: mq@multiquip.com
www.multiquip.com

MIXERS



MQ WHITEMAN

Plaster/Mortar and concrete models
for the professional contractor.



MQ Whiteman™ mixers have the features, quality, and engineering excellence preferred by contractors and the equipment rental industry. Our heavy-duty mixers are reliable, easy to maintain and available in a full range of sizes and engine configurations for most applications.

Choose from steel or EasyClean™ polyethylene drums. Whatever your selection, **MQ Whiteman** sets the standard for performance and value.

Models available in 7-, 9-, and 12-cubic foot capacities.



WM90P
(9 cubic ft., Poly drum)

- **High-strength cast iron paddle arms** with wiper blades for a clean, uniform mix.
- **Heavy-duty safety grate** with built-in bag cutter.
- **Durable paddle shaft of 1 3/4"** square hardened steel. Greasable, double-sealed bearings provide a long service life.
- **Drum lock** allows positive "mix" and "tow" positions for safety.
- **Removable tow bar** manufactured of schedule 80 steel and available with choice of 2" ball, pin-type coupler or loop coupler.*
- **Forklift pocket** facilitates placement in the yard and on the jobsite.*
- **Solid 1 5/8" solid axle with large B78x13" tires** for smooth towing.*

* Excludes WM45.




WM90S
(9 cubic ft., Steel drum)



WM45
(4.5 cubic ft., Steel drum)
Non-towable

Unique wheelbarrow design ideal for small batch jobs and indoor work. Available with either electric or gasoline drive.

Heavy-Duty Features



Innovative seal system.

Double-sealed bearings with greasable shaft seals. Specially designed seep hole protects bearings and warns when seal needs replacement.



Built to last. Heavy duty safety grid with auto-open safety bar. Wider dump chute for faster, easier pours.



Less vibration. Engine is mounted solid to base, minimizing vibration. The engine sits level — for accuracy when checking oil.



Double V-belt/gear drive. Allows larger, heavier mixes. Cast-steel pulleys increase durability. Idler wheel provides easy, positive engagement.



Convenient, easy operating engine engagement lever.

Thick tubular steel reinforced frame resists damage, provides superior strength and proper dumping clearance.

MUDTUB

The **Multiquip MUD TUB** is the easy choice for supplying mortar to professional masons. It is engineered for durability & easy cleanup with two available models to meet your job requirements.



- **Large capacity tub** – 10 cubic feet – can be used for transporting up to 1,000 pounds (454 kg) of mortar or other job site materials.
- **Easy Clean™** construction simplifies cleanup. Dry mortar releases from polyethylene the tub, without damage, by simply tapping with a mallet.
- **Durable polyethylene material** resists harsh treatment on the job site and extreme temperatures – heat and cold – while offering UV resistance.
- **Impact resistant**, 8-inch diameter, casters are available to simplify movement on smooth surfaces; a skid model is available with 4-inch rectangular steel bases for durability and is ideal for work on scaffolding.
- **Choose between two models** the (MUDTUBW) features 8" casters and a stationary model (MUDTUB) features a heavy-duty skid design.



Setting the standard for innovation and dependability!

Improve output and keep up with demands for higher production while mixing larger, heavier loads. The **WM120**-Series features hydraulic drive to power through the stiffest, low slump, mix designs. Contractors will appreciate the standard hydraulic dump which improves productivity while reducing fatigue. Equipment owners will appreciate the reduced maintenance costs the system provides by eliminating clutches and belt drives.

**WM120PHD**

12 cubic ft — hydraulic drive, hydraulic dump, EasyClean drum — available with steel drum

- **Rugged 14 gauge steel engine cover** with punched pressed ventilation openings for increased cooling and added strength.
- **EasyClean™ polyethylene drums simplify cleanup.** Steel drums also available.
- **High-strength cast-iron paddle arms** with wiper blades for a clean, uniform mix.
- **Heavy duty safety grate** with built-in bag cutter.
- **Durable paddle shaft** of 1 3/4" square hardened steel. Double-sealed bearings with eight spring loaded greaseable shaft seals.
- **Heavy-duty removable tow tongue** made of tough schedule 80 steel.
- **Solid 5/8" axle** with large B78x13" tires for smooth towing.
- **Controls Levers** provide the ability to control mix direction (forward/reverse) and raise/lower the dump mechanism.

Multiquip concrete mixers are available with either steel or polyethylene drums. Their durable construction and low maintenance requirements will provide you with years of reliable service.



Model MC94S (9 cubic ft.)

- **Wide drum opening** for easy loading of material.
- **Durable Steel drums** are available in 4, 6 and 9 cubic foot capacities.
- **Multi-position dump wheel** for safe material discharge.
- **Heavy-duty one-piece cast iron ring gear** for long life.
- **Heavy-duty retractable tow bar** made of schedule 80 steel available with loop coupler, 2" ball coupler or pin-type coupler.
- **Axle springs**, selected models, and large B78x13" tires for smooth towing to your job.**
- **Rugged 14-gauge steel engine covers** with punched ventilation openings for increased cooling and added strength.

* 4-cubic foot models available with steel drums only.

** Axle springs not available on 4-cubic foot models.



CONCRETE MIXERS

EasyClean™ makes all the difference...

BEFORE



In all standard steel drum mixers, this dried concrete could be a nightmare to clean out...

AFTER



...but not with an EasyClean mixer! A few taps with a rubber mallet and the dried concrete falls right out!



Model MC94P (9 cubic ft.)

Polyethylene drums available in 6 and 9 cubic foot models only.

THE EASycLEAN™ ADVANTAGE

Our polyethylene drums put an end to clean up problems and save you time and money.

Removing dry material from a steel-drum mixer, may take several hours and result in dents or damage in the process.

A simple tap with a rubber mallet does the job — cleans out in minutes without dents, rust or cracks!



The **Mix-N-Go Concrete Mixer** can mix up to three cubic feet of material, making it ideal for homeowners and small contractors.

MIX-N-GO

Available with either a steel or polyethylene drum, the Mix-N-Go is ideal for small footings and bases, binding block and concrete patching. It is available with a gasoline engine or electric motor for operator convenience. It can also be used as a wheelbarrow to transport concrete, and other material around the job site.

- **Engine options**—Gasoline or $\frac{3}{4}$ HP, 115 single-phase UL- and CSA-approved electric motor.
- **Pneumatic tires**—for convenience on rough terrain
- **Gearbox** - gears immersed in oil for long trouble-free life
- **Mixer stand** allows drum to rotate 360 degrees, easily removed to use as wheelbarrow

Specifications

Model	Drum Construction	Max. Mixing Capacity*	Engine	Height in. (mm)	Width in. (mm)	Length in. (mm)	Stand Weight lb. (kg)	Dry Weight lb. (kg)
MC3SEA	Steel	3.0 cubic ft.	$\frac{3}{4}$ HP, 115V, 1 ϕ Electric Motor	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	138 (62.6)
MC3PEA	Polyethylene	3.0 cubic ft.	$\frac{3}{4}$ HP, 115V, 1 ϕ Electric Motor	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	138 (62.6)
MC3SBA	Steel	3.0 cubic ft.	Briggs & Stratton 148cc	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	132 (59.9)
MC3PBA	Polyethylene	3.0 cubic ft.	Briggs & Stratton 148cc	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	132 (59.9)



Whiteman Mixers - Specifications

Plaster/Mortar Mixers — Poly-Drum Models

Model	WM70P	WM90P	WM120PHD (Hydraulic)
Capacity — cu.ft. (liters)	7 (93)	9 (248)	12 (340)
Capacity — bags	1½ to 2½	2½ to 3½	3½ to 4
Power Sources**	1.5 HP 1ø 115/230V Electric 4.8 HP Honda 7.9 HP Honda	3 HP 1ø 230V Electric 7.9 HP Honda	11.7 HP Honda
Drum Material	Polyethylene	Polyethylene	Polyethylene
Average weight* — lbs. (kg)	690 (313)	785 (356)	1,010 (454)
Length w/tongue x W x H — in. (cm)	98x50x56 (248x127x142)	98x50x59 (248x127x150)	82x51x60 (208x130x152)
Height including handle — in. (cm)	73 (185)	77 (196)	75 (191)
Discharge height — in. (cm)	21 (53)	21 (53)	17 (43)
Drive	V-Belt	V-Belt	Hydraulic
Dump Action	Manual	Manual	Hydraulic Dump

Plaster/Mortar Mixers — Steel-Drum Models

Model	WM45	WM63	WM70S	WM90S	WM120SHD (Hydraulic)
Capacity — cu.ft. (liters)	4.5 (113)	6.3 (178)	7 (93)	9 (248)	12 (340)
Capacity — bags	½	1½ to 2	1½ to 2½	2½ to 3½	3½ to 4
Power Sources**	1.0 HP 1ø 115/230V Electric 4.8 HP Honda	1.5 HP 1ø 115/230V Electric 4.8 HP Honda 7.9 HP Honda	1.5 HP 1ø 115/230V Electric 4.8 HP Honda 7.9 HP Honda	3 HP 1ø 230V Electric 7.9 HP Honda	11.7 HP Honda
Drum Material	Steel	Steel	Steel	Steel	Steel
Average weight* — lbs. (kg)	380 (172)	574 (260)	690 (313)	785 (356)	1,010 (454)
Length w/tongue x W x H — in. (cm)	67x28.5x41 (170x65x104)	92.5x28.5x41 (235x65x104)	98x50x56 (248x127x142)	98x50x59 (248x127x150)	82x51x60 (208x130x152)
Height including handle — in. (cm)	60 (152)	54.6 (1384)	73 (185)	77 (196)	75 (191)
Discharge height — in. (cm)	7.5 (19)	18 (46)	21 (53)	21 (53)	17 (43)
Drive	V Belt/Gear	V Belt/Gear	V-Belt	V-Belt	Hydraulic
Dump Action	Manual	Manual	Manual	Manual	Hydraulic Dump
Towable	No	Yes	Yes	Yes	Yes

Concrete Mixers — Steel- and Poly-Drum Models

Steel Drum Models				Polyethylene Drum Models	
Model	MC44S	MC64S	MC94S	MC64P	MC94P
Capacity — cu.ft. (liters)	4 (110)	6 (165)	9 (248)	6 (165)	9 (248)
Capacity — bags	½	½	1	½	1
Power Sources**	0.5 HP 1ø 115V Elect. 3.5 HP Honda	1.5 HP 1ø 115/230V Elect. 4.8 HP Honda 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 4.8 HP Honda 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 7.9 HP Honda
Average weight* — lbs. (kg)	495 (225)	685 (311)	810 (367)	685 (311)	800 (363)
Length w/tongue x W x H — in. (cm)	87x51x54 (221x130x137)	102X51X59 (259X130X150)	106x51x63 (269x130x160)	102X51X59 (259X130X150)	106x51x63 (269x130x160)
Discharge height — in. (cm)	23 (58)	23 (58)	23 (58)	23 (58)	23 (58)
Drum opening — in. (cm)	16 (40)	17 (43)	19.7 (50)	19 (48)	23.7 (60)
Drum depth — in. (cm)	26 (66)	29 (74)	31 (79)	29 (74)	31 (79)
Tires	B78x13	B78x13	B78x13	B78x13	B78x13
Drive	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt
Dump Action	Manual	Manual	Manual	Manual	Manual

* Mixer weight shown is an average; exact weight is dependent upon power source.

* Actual mix capacity based on a 94lb. bag of Portland cement. May vary depending on aggregate size and mix design.

** Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

All mixers available with loop coupler, 2" ball coupler or pin-type coupler. Heavy duty safety chains are included.



MIXERS



MQ ESSICK

**The choice of the
professional mason**



For almost 90 years **MQ Essick** plaster / mortar mixers have set the standard for innovation and durability. The 12 cubic foot capacity **PRO12** series increases contractor productivity in applications using on-site silo dispensing systems. The PRO12 uses a powerful hydraulic drive to power through the toughest mix designs. A unique over-center dump design easily discharges material into large mud tubs with minimal operator fatigue.



PRO12 (12 cubic ft.) shown with Mud Tub (sold separately)
Honda GX390

- **Reduced fatigue** by enabling operator to load at waist level. Ergonomically designed to load low and dump high.
- **Adapt to any job site**, while maintaining a compact footprint, with 130° swing-away stabilizers.
- **Extra thick 1/4" steel drum wrap with 3/8" ends** resists wear and dents.
- **Adjustable height** - discharge height 24" ~ 42.5".
- **Easily fits in a standard pickup truck bed** with its compact design with inboard hydraulic motor.
- **Extended run times** - up to 8 hours – with 5-gallon fuel tank.
- **Costly waste is reduced** by a spill plate that directs excess material into the tub.
- **Tackle stiff mix designs**, and handle up to 1-inch aggregate, with a powerful hydraulic drive.
- **Convenient access forklift pockets** from any side of the mixer.
- **Drive and dump controls easily accessible** and located above the engine cowling.
- **Greasable paddle shaft seal** provides long service life.



PRO12 - retractable, swing away stabilizers adapt to application requirements.


Professional masonry contractors choose **MQ Essick Mixers** for their performance and reliability. Our heavy duty mixers are low maintenance and are available in a full range of sizes and drive configurations to suit any application.



Maintenance free seal system protect the shaft and bearings from wear. Spring-loaded and self-adjusting graphite seals require no greasing.

EM120SM (12 cubic ft.) — available with mechanical drive transmission.

- **High strength cast iron** paddle arms with rubber blades for a clean, uniform mix.
- **Durable paddle shaft** of 1^{3/4}" square hardened steel. Spring-loaded self-adjusting seals. No greasing required.
- **Heavy duty safety grate** with built-in bag cutter.
- **Rugged 14 gauge steel engine covers** adds strenght and punched ventilation provides optimal cooling and added strength.
- **Solid 5/8" axle** with large B78x13" tires for smooth towing.
- **Heavy duty removable tow bar** made of schedule 80 steel available with loop coupler, 2-inch ball coupler or pin-type coupler.




Mechanical Drive

Drive gear and multiple disc clutch are immersed in oil and fully protected for long, trouble-free life. Eliminates wear components like V-belts, external gears and pulleys. Powers through stiffer mixes.



Essick mixers are the ideal choice for most jobs. Their durable construction, easy maintenance and reliable design, make it the right choice for masonry contractors.

- **High strength cast iron** paddle arms with rubber blades for a clean, uniform mix.
- **Durable paddle shaft** manufactured of 1 3/4" square hardened steel.
- **Paddle shaft seals** are spring-loaded, self-adjusting and require no greasing.
- **Heavy duty safety grate** with built-in bag cutter.
- **Drum lock** secures drum while towing.
- **Rugged 14 gauge steel engine covers** adds strenght and punched ventilation provides optimal cooling and added strength.
- **Solid 5/8" axle** with large B78x13" tires for smooth towing.
- **Forklift pockets** facilitate loading on trucks or transport on rough terrain.



Less vibration.

Engine is mounted solid to base, minimizing vibration. The engine sits level — for accuracy when checking oil.



Built to last.

Heavy duty safety grid with auto-open safety bar. Wider dump chute for faster, easier pours.



Double V-belt/gear drive.

Allows larger, heavier mixes. Cast-steel pulleys increase durability. Idler wheel provides easy, positive engagement.



Convenient, easy operating engine engagement lever.

Thick tubular steel reinforced frame resists damage, provides superior strength and proper dumping clearance.

The **Multiquip MUD TUB** is the easy choice for supplying mortar to professional masons. It is engineered for durability & easy cleanup with two available models to meet your job requirements.



- **Large capacity tub** – 10 cubic feet – can be used for transporting up to 1,000 pounds (454 kg) of mortar or other job site materials.
- **EasyClean™** construction simplifies cleanup. Dry mortar releases from polyethylene the tub, without damage, by simply tapping with a mallet.
- **Durable polyethylene material** resists harsh treatment on the job site and extreme temperatures – heat and cold – while offering UV resistance.
- **Impact resistant**, 8-inch diameter, casters are available to simplify movement on smooth surfaces; a skid model is available with 4-inch rectangular steel bases for durability and is ideal for work on scaffolding.

Specifications

Model	Weight	Dimensions (LxWxH)
MUDTUB	54 Lbs. (24.4 kg)	56.75" x 28.25" x 22.75" (1141 cm x 717.5 cm x 577.8 cm)
MUDTUBW	81 Lbs. (36.7 kg)	56.75" x 28.25" x 28.25" (1141 cm x 717.5 cm x 717.5 cm)

EasyClean™ makes all the difference...

BEFORE



In all standard steel drum mixers, this dried concrete could be a nightmare to clean out...

AFTER



...but not with an EasyClean mixer! A few taps with a rubber mallet and the dried concrete falls right out!



Model MC94P (9 cubic ft.)

Polyethylene drums available in 6 and 9 cubic foot models only.

THE EASYSYCLEAN™ ADVANTAGE

Our polyethylene drums put an end to clean up problems and save you time and money.

Removing dry material from a steel-drum mixer, may take several hours and result in dents or damage in the process.

A simple tap with a rubber mallet does the job — cleans out in minutes without dents, rust or cracks!



The **Mix-N-Go Concrete Mixer** can mix up to three cubic feet of material, making it ideal for homeowners and small contractors.

MIX-N-GO

Available with either a steel or polyethylene drum, the Mix-N-Go is ideal for small footings and bases, binding block and concrete patching. It is available with a gasoline engine or electric motor for operator convenience. It can also be used as a wheelbarrow to transport concrete, and other material around the job site.

- **Engine options**—Gasoline or $\frac{3}{4}$ HP, 115 single-phase UL- and CSA-approved electric motor.
- **Pneumatic tires**—for convenience on rough terrain
- **Gearbox** - gears immersed in oil for long trouble-free life
- **Mixer stand** allows drum to rotate 360 degrees, easily removed to use as wheelbarrow

Specifications

Model	Drum Construction	Max. Mixing Capacity*	Engine	Height in. (mm)	Width in. (mm)	Length in. (mm)	Stand Weight lb. (kg)	Dry Weight lb. (kg)
MC3SEA	Steel	3.0 cubic ft.	$\frac{3}{4}$ HP, 115V, 1 ϕ Electric Motor	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	138 (62.6)
MC3PEA	Polyethylene	3.0 cubic ft.	$\frac{3}{4}$ HP, 115V, 1 ϕ Electric Motor	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	138 (62.6)
MC3SBA	Steel	3.0 cubic ft.	Briggs & Stratton 148cc	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	132 (59.9)
MC3PBA	Polyethylene	3.0 cubic ft.	Briggs & Stratton 148cc	34 (863.6)	23 - 5/8 (584.2)	48 - 1/2 (1219.2)	35 (15.9)	132 (59.9)



Specifications

Steel-Drum Models Plaster/Mortar Mixers				
Model	EM70S	EM90S	EM120SM (Mechanical)	PRO12 (Hydraulic)
Capacity — cubic ft. (liters)	7 (93)	9 (248)	12 (340)	12 (340)
Capacity — bags (portland)	1½ to 2½	2½ to 3½	3½ to 4	3 to 4
Power Sources**	1.5 HP 1ø 115/230V Electric 4.8 HP Honda 7.9 HP Honda	3 HP 1ø 230V Electric 7.9 HP Honda	5 HP 1ø 230V Electric 5 HP 3ø 230/460V Electric 10.7 HP Honda	Honda GX390 11.7hp (8.7 kW)
Drum Material	Steel	Steel	Steel	Steel
Average weight* — lbs. (kg)	690 (313)	785 (356)	1,090 (494)	1580 (716.7)
Length w/tongue x W x H — in. (cm)	98x50x56 (248x127x142)	98x50x59 (248x127x150)	82x51x60 (208x130x152)	73.5 x 35.0 x 45.0
Height including handle — in. (cm)	73 (185)	77 (196)	75 (191)	Up to 42.5 inches
Discharge height — in. (cm)	21 (53)	21 (53)	17 (43)	N/A
Tires	B78x13"	B78x13"	B78x13"	Stationary
Drive	V-Belt	V-Belt	Mechanical	Hydraulic
Dump Action	Manual	Manual	Manual	Hydraulic

Concrete Mixers — Steel- and Poly-Drum Models					
	Steel Drum Models			Polyethylene Drum Models	
Model	MC44S	MC64S	MC94S	MC64P	MC94P
Capacity — cubic ft. (liters)	4 (110)	6 (165)	9 (248)	6 (165)	9 (248)
Capacity — bags	1/3	½	1	½	1
Power Sources**	0.5 HP 1ø 115V Elect. 3.5 HP Honda	1.5 HP 1ø 115/230V Elect. 4.8 HP Honda 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 4.8 HP Honda 7.9 HP Honda	1.5 HP 1ø 115/230V Elect. 7.9 HP Honda
Average weight* — lbs. (kg)	495 (225)	685 (311)	810 (367)	685 (311)	800 (363)
Length w/tongue x W x H — in. (cm)	87x51x54 (221x130x137)	102X51X59 (259X130X150)	106x51x63 (269x130x160)	102X51X59 (259X130X150)	106x51x63 (269x130x160)
Discharge height — in. (cm)	23 (58)	23 (58)	23 (58)	23 (58)	23 (58)
Drum opening — in. (cm)	17.5 (44)	19 (48)	21 (53)	19 (48)	21 (53)
Drum depth — in. (cm)	26 (66)	29 (74)	31 (79)	29 (74)	31 (79)
Tires	B78x13	B78x13	B78x13	B78x13	B78x13
Drive	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt
Dump Action	Manual	Manual	Manual	Manual	Manual

* Mixer weight shown is an average; exact weight is dependent upon power source.

* Actual mix capacity based on a 94lb. bag of Portland cement. May vary depending on aggregate size and mix design.

** Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

All mixers available with loop coupler, 2" ball coupler or pin-type coupler. Heavy duty safety chains are included.





VENTE • LOCATION • RÉPARATION

**FOURNITURES INDUSTRIELLES
ÉQUIPEMENTS DE LA CONSTRUCTION
MOTEURS ÉLECTRIQUES
AIR COMPRIMÉ
POMPES ET ACCESSOIRES
MANUTENTION ET EMBALLAGE
MACHINERIE À BOIS ET À MÉTAL
PRODUITS SANITAIRES
ÉQUIPEMENT DE SÉCURITÉ**

| RIMOUSKI

559, rue de Lausanne
Tel.: 418 723-7936
Fax: 418 723-8172

1 888 342-5637
dickner@dickner.com

| RIVIÈRE-DU-LOUP

370, rue Témiscouata
Tel.: 418 867-1824
Fax: 418 862-9881

1 800 463-8027
riviereduloup@dickner.com

| MONT-JOLI

1281, boul. Jacques Cartier
Tel.: 418 775-4200
Fax: 418 775-4996

1 418 775-4200
montjoli@dickner.com